


TB-68-DOOR

Door open-in and out door systems (thermally broken)

The system is glazed internally to accommodate a range of double glazed units, using standard beads. As with all **Jalal** systems, the Door system is manufactured to exacting standards enabling economy to be combined with strength to give many years of aesthetic, trouble-free operation.

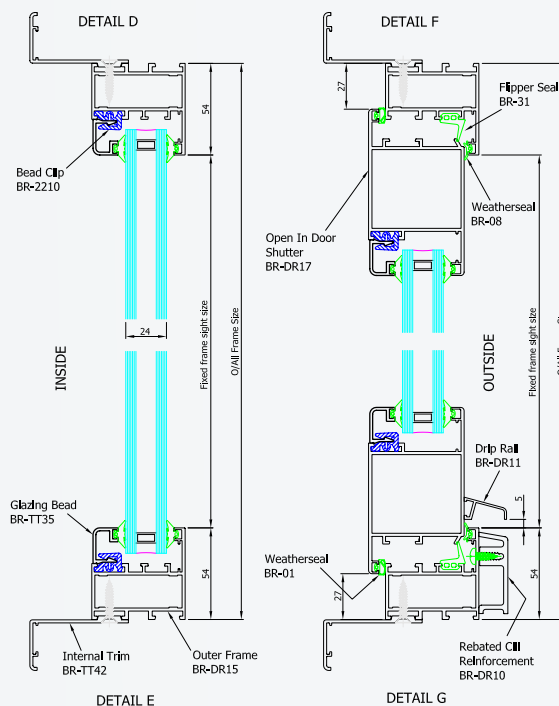

TB-68-DOOR

System Performance



SIZE

- Corners formed as 45 degree mitres to provide a quality appearance, high performance and weather resistance



DESIGN

- Corners formed as 45 degree mitres to provide a quality appearance, high performance and weather resistance.
- Designed to perform at wind resistances up to 1.2 kPa.




PERFORMANCE

- The system offers high quality thermally broken sections to suit specific project requirements and reduce heat gain.
- Thermal performance can achieve U_w of 1.8 W/m²K.




INSTALLATION

- Windows are hung on heavy duty fixed hinges with concealed multi-locking system for effective weather resistance and security.

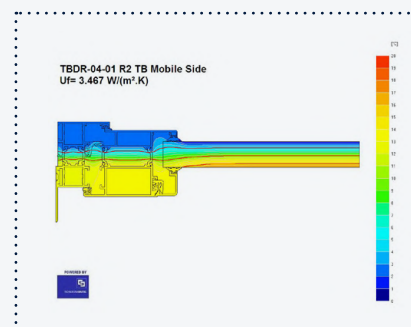

Isotherm Diagram



DISCOVER
MORE ON OUR
WEBSITE