
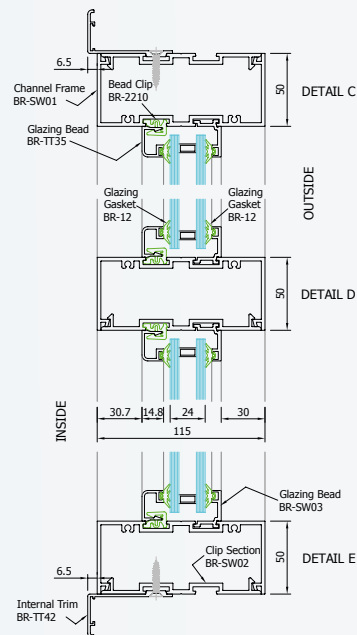


NTB-55-SWDR

Swing Door System (Non-Thermally Broken)

The system is glazed internally to accommodate a range of double glazed units, using standard beads. As with all **Jalal** systems, the door system is manufactured to exacting standards enabling economy to be combined with strength to give many years of aesthetic, troublefree operation.

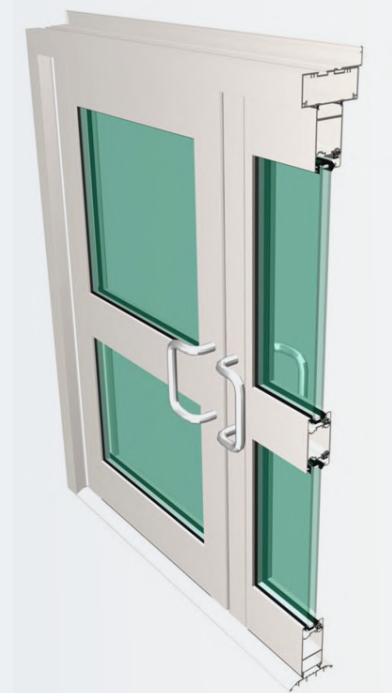

NTB-55-SWDR

System Performance



SIZE

- Door shutter weights
Medium Duty Door with BR-8020 Hinge: 150 kg (max)
- Balcony Door
with two BR-9211.6 hinges : 80kg (max)
with three BR-9211.6 hinges: 90kg (max)
with two BR-8041.1 hinges: 90kg (max)



DESIGN

- All frame joints are fully sealed during manufacture.
- Robust design ensures they are suitable for high traffic applications such as main entrance doors
- Opening panels fully weather-sealed with woolpile seals.




PERFORMANCE

- The system offers high quality thermally broken sections to suit specific project requirements and reduce heat gain.
- Thermal performance can achieve U_w of 1.6 W/m²K.



INSTALLATION

- Windows are hung on heavy duty fixed hinges with concealed multi-locking system for effective weather resistance and security.



DISCOVER
MORE ON OUR
WEBSITE