


SG-4-56-RG

4 Sided Frameless Structurally Glazed Roof System

The system currently suits 35.5mm double glazing units as either fixed or opening shutters. Used in conjunction with each other an almost limitless number of permutations can be achieved to suit most architectural requirements. Fixed double glazing incorporates flush edged double glazing units whilst the opening shutters utilise double glazing units that have stepped edges to enable clean and continuous sight lines whilst providing high levels of performance. All double glazed units **MUST** be dual sealed with a P.I.B. primary seal and a silicone secondary seal suitable for units being placed in SSG applications.

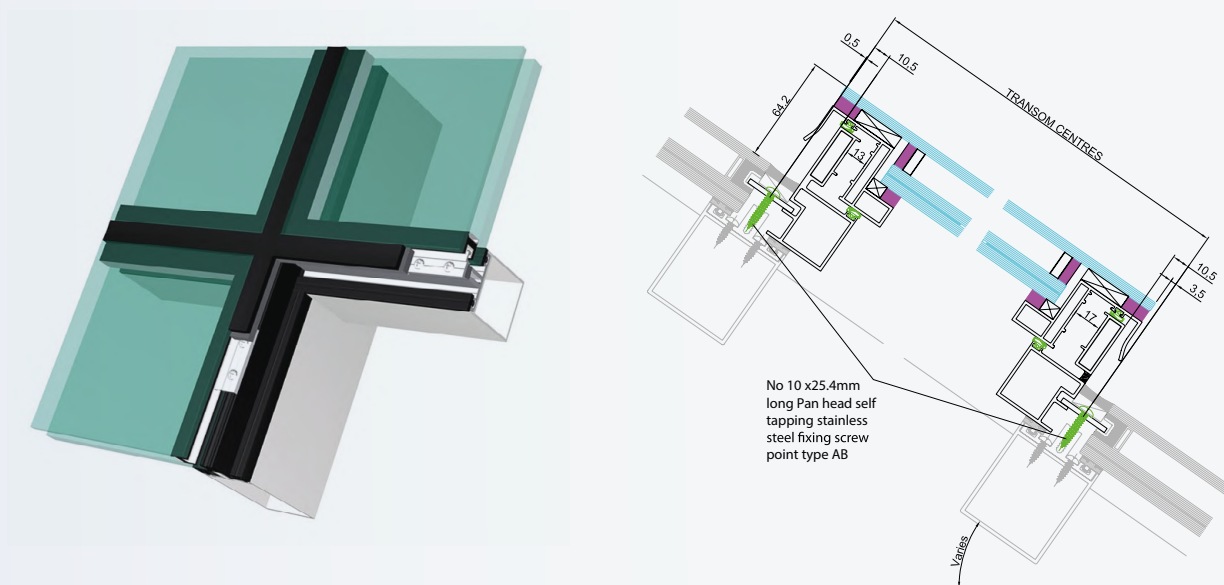

SG-4-56-RG

System Performance



SIZE

- Profile width only 56mm and Profile depths from 43mm to 200mm.



DESIGN

- Designed to perform at windloads in excess of 3.5 kPa.
- Designed to meet the CWCT standards so meets BS:EN, ASTM, AAMA specifications.
- Designed to be fully compatible with the range of **Jalal** Curtain wall systems




PERFORMANCE

- Thermal performance can achieve U_{cw} of 1.6 W/m²K.
- Thermal Break frameless outward opening vent panels can be incorporated



INSTALLATION

- Neat fully sealed weatherseal joints plus a special continuous gutter gasket providing a drainage system as well as two lines of defence against water ingress.



DISCOVER
MORE ON OUR
WEBSITE