
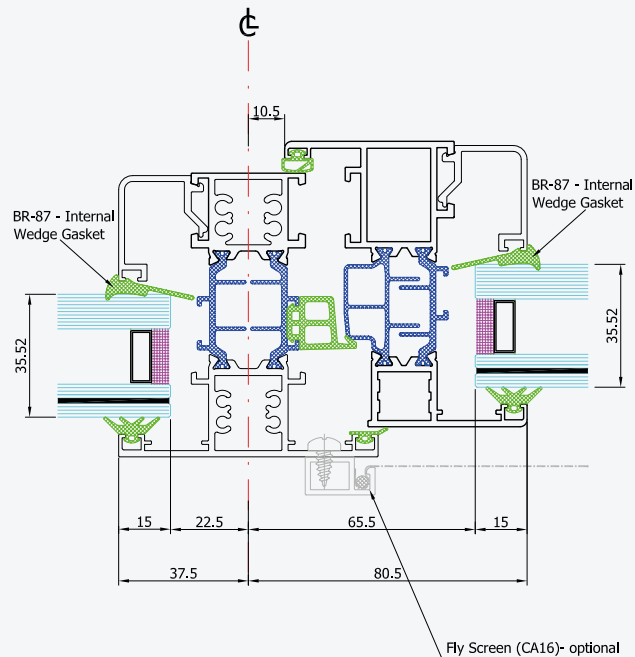


# TB-82

## Window system Open-in casements

The system is glazed internally to accommodate 28mm to 56mm double glazed units, using standard beads. As with all **Jalal** systems the Til & Turn window system is manufactured to exacting standards, enabling economy to be combined with strength to give many years of aesthetic, trouble-free operation.

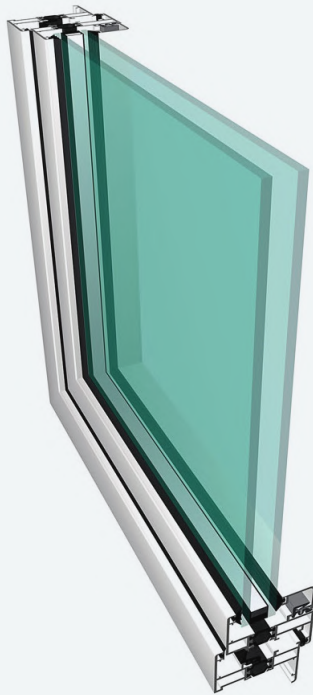

### TB-82

#### System Performance



SIZE

- The system is glazed internally to accommodate 28mm to 56mm double glazed units, using standard beads



DESIGN

- Aluminium profiles are extruded from aluminium alloy 6063 T6 complying with the recommendations of BS EN 12020-2:2008 / BS EN 755-9:2008



PERFORMANCE

- Air permeability - BS6375: Pt1:1983 test pressure 600 Pa
- Water tightness - BS6375: Pt1:1983 test pressure 600 Pa
- Wind resistance - BS6375: Pt1:1983 test pressure 2400 Pa



INSTALLATION

- Detailed installation instructions are provided which should be strictly followed.
- **Jalal** recommend the use of restrictors to prevent the window opening more than 90° in the side hung mode.

DISCOVER  
MORE ON OUR  
WEBSITE

