


TB-68-CASE

Case tilt & turn window system (thermally broken)

The system is glazed internally to accommodate 24mm or 26mm double glazed units, using standard beads. As with all **Jalal** systems, the Tilt & Turn window system is manufactured to exacting standards enabling economy to be combined with strength to give many years of aesthetic trouble-free operation.

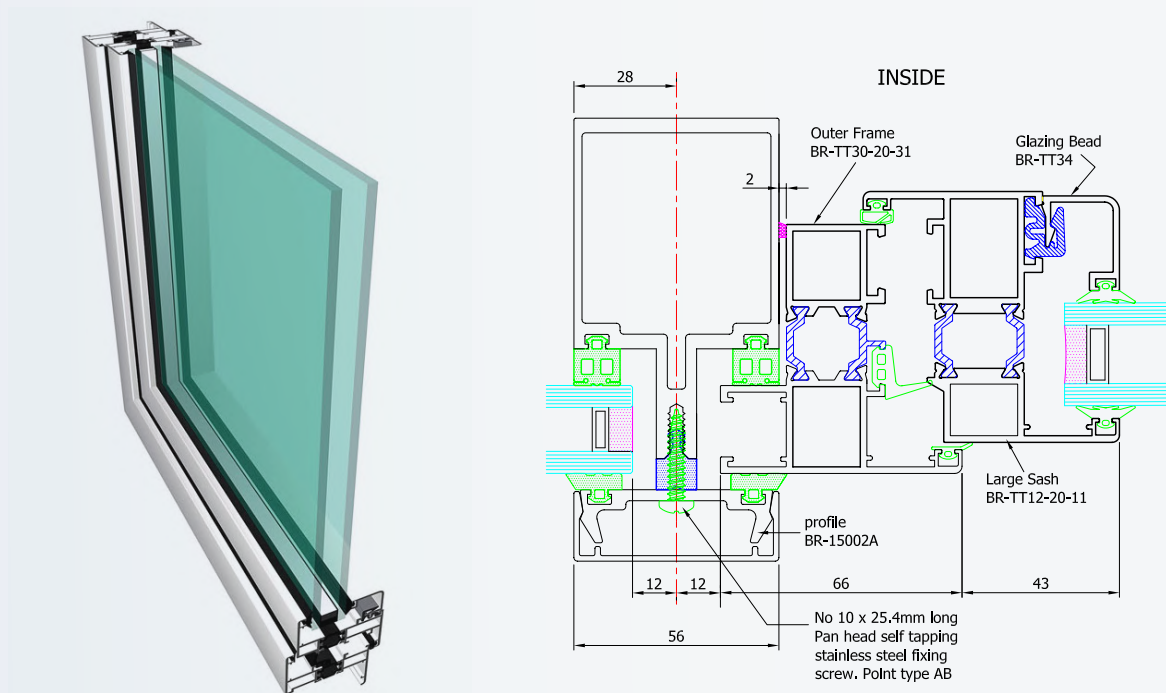

TB-68-CASE

System Performance



SIZE

- Corners formed as 45 degree mitres to provide a quality appearance, high performance and weather resistance



DESIGN

- Economy is combined with strength to provide many years of trouble free operation and to be aesthetically pleasing.
- Designed to perform at wind resistances up to 2.4 kPa.




PERFORMANCE

- Thermal performance can achieve U_w of 1.6 W/m²K.
- Opening panels fully weather-sealed with EPDM gaskets.



INSTALLATION

- Accommodates various thicknesses of single and double glazed units.
- Thermal Break frameless outward opening vent panels can be incorporated.
- Neat fully sealed weather seal joints.

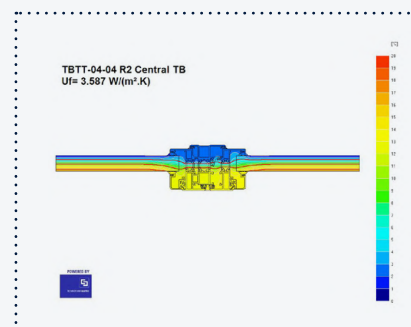

Isotherm Diagram



DISCOVER
MORE ON OUR
WEBSITE